



The following technical datasheet is provided by Tramex.

For further information please either give us a call or visit the manufacturer's website.

Wood Floors and Accessories cannot be held liable for the information contained within this document.  
All information is correct at the time of download from the manufacturer.

---

Spilsby Road • Harold Hill • Romford • RM3 8SB • **T** 020 8501 6730 • **E** [info@wfa.uk.net](mailto:info@wfa.uk.net) • **W** [www.wfa.uk.net](http://www.wfa.uk.net)

Registered in England under Company No: 03746590 VAT No: 765 9995 45

# CONCRETE MOISTURE ENCOUNTER



The Tramex Concrete Moisture Encounter 5 (CME5) is a non-destructive analog moisture meter for concrete floors and slabs providing instant and precise quantitative measurement of moisture content using Gravimetric testing as a baseline. The CME5 also provides Carbide Method equivalent readings for concrete and other cementitious substrates as well as comparative readings as per ASTM F2659.




Product Order Code: CME5



## FEATURES



NON-DESTRUCTIVE



CONCRETE %MC  
READING RANGE



CM EQUIV ANHYDRITE  
READING RANGE




CM EQUIV CONCRETE  
READING RANGE



ASTM  
F2659




ACCOMPANYING  
APP



EXTENSION HANDLE  
(optional)

## HOW IT WORKS


The Tramex Concrete Moisture Encounter detects and evaluates the moisture conditions within the slab or screed by non-destructively measuring the electrical impedance. A low frequency electronic signal is transmitted into the material under test via the electrodes in the base of the instrument. The strength of this signal varies in proportion to the amount of moisture present in the material. The Concrete Moisture Encounter determines the strength of the current and converts this to a moisture content value or CM Equivalent value for concrete slabs and other cementitious floor screeds, displayed on a large clear analogue dial.

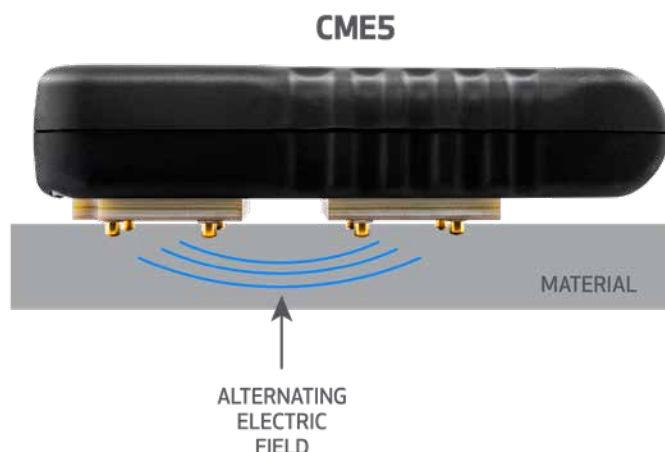

## OPERATING PROCEDURE

To carry out tests simply brush any dust from a smooth area of concrete and also from the electrodes, switch on the Concrete Moisture Encounter and place it firmly onto the surface, fully compressing the spring-loaded, signal-enhancing contacts on the base. Read the moisture content from the clear analogue dial.

The Concrete Moisture Encounter is calibrated to give percentage moisture content readings on clean, bare dust free concrete floor slabs, with a depth of penetration of approx. 20 mm (¾"). Readings taken on concrete slabs through paint, coatings, adhesives or other materials on the surface should be regarded as qualitative or comparative and not quantitative.

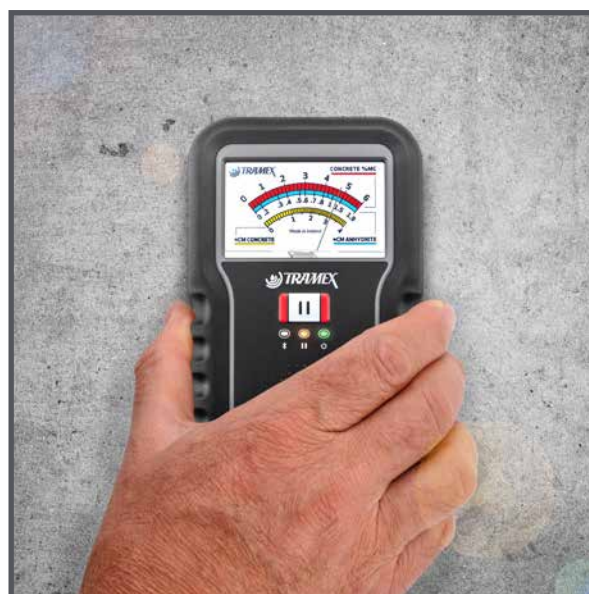

## SPECIFICATIONS

Size:	160mm x 85mm x 38mm (6.3" x 3.5" x 1.5")
Weight:	344g (12.1oz)
Construction:	ABS Body
Power:	2 x AALR6 ALKALINE (included)
Display:	Analogue
Depth of penetration:	20 mm approx. (¾")

## MEASURING RANGE

Moisture Content for Concrete :	0 to 6%
Carbide Method moisture content equivalent for Concrete :	0 to 4
Carbide Method moisture content equivalent for Anhydrite :	0 to 1.9

Free App Available for Mobile and Tablet:

